Aluminum PC Case Installation Guide

Case components

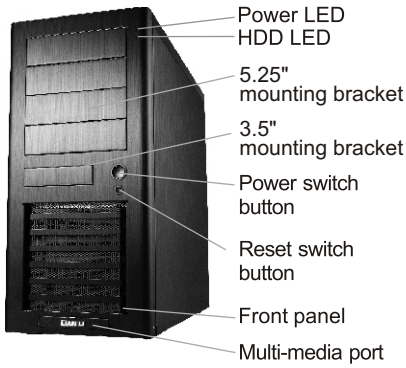

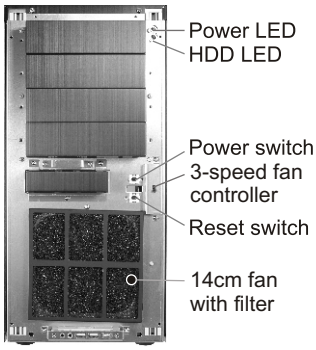



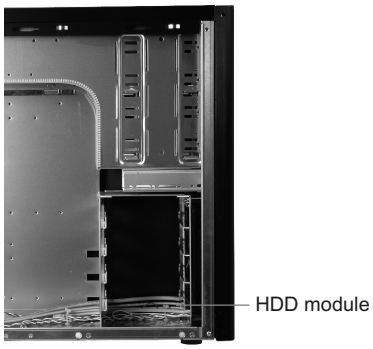

Guide to open left and right side panels

1. Remove four thumb screws.
2. Slide panel backward of the case.
3. Lift up the side panel.



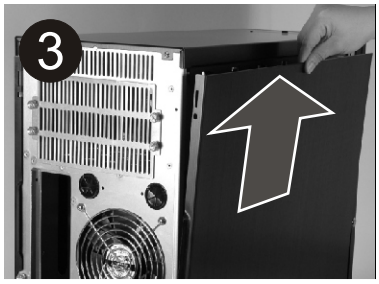

Motherboard installation



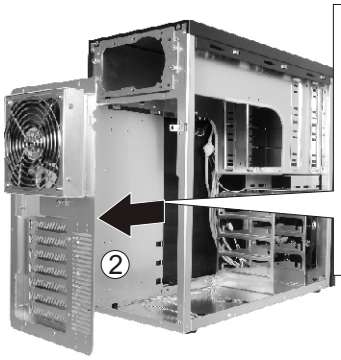

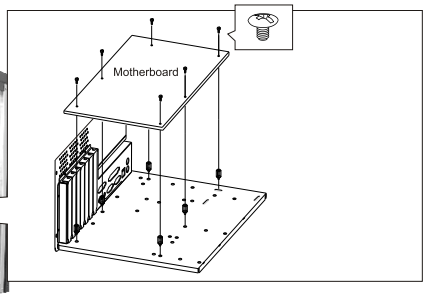

Loosing four thumb screws to release the M/B tray.

Secure the stand-off bolts on the M/B tray which match with the M/B fix points, place the M/B on the copper bolt, fasten the screws to secure.

Removable top panel



Loosing four screws to remove the tep panel

Caution:Both side panels need to remove first in order to remove the top panel

Remove front panel

Pull the front panel toward yourself.

Remove mounting bracket

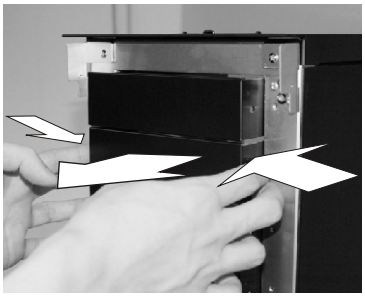

Press mounting bracket (right and left side) to remove 5.25” bracket.

Removable fan filter



Push up the filter bracket from the bottom to remove the fan filter for cleaning.

Hardware list

∗ Extra quantities are spare parts.

Screw(31) to fix drive & motherboard	Buzzer wire(1)	Thumb screw(18) & rubber ring(18) for fix HDD	Screw(6) to fix power supply
Copper bolt(12) for motherboard	Cable tie(3) for cable		Clamp(1) to secure wire
Screw driver(1) to ass’y motherboard	Thumb screw(4) for HDD extra fixing	Thumb screw(2) spare part	Fan(1)

Hard disk installation for modularized HDD cage

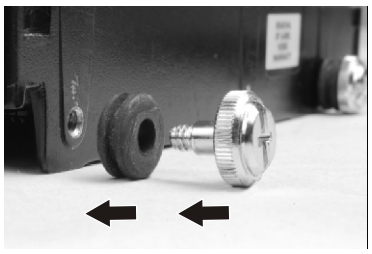

1. Fasten the HDD screws with anti-vibration rubber rings to the HDD.

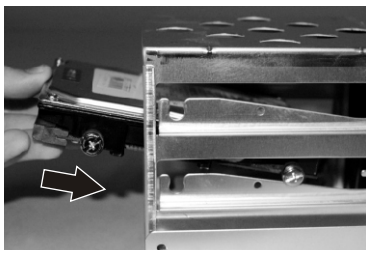

2. Slide the HDD into the HDD cage with the anti-vibration kit.



Press down the HDD into the slots to secure.



Note:
Adding extra screw to the HDD cage for extra security.

Removable PSU tray

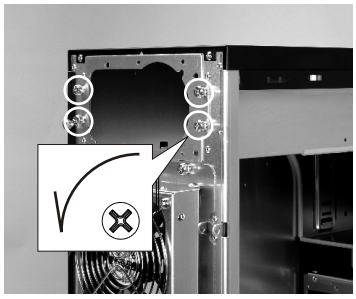

Loosing four thumb screws to remove the PSU tray



Assembling the power supply with PSU tray, and push in gently.

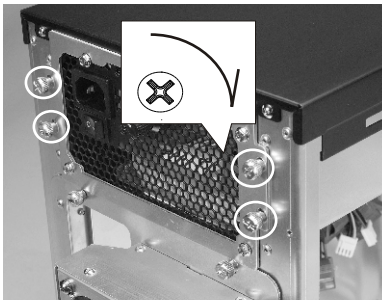

Tasten four thumb screws

12cm fan installation





I/O Port installation

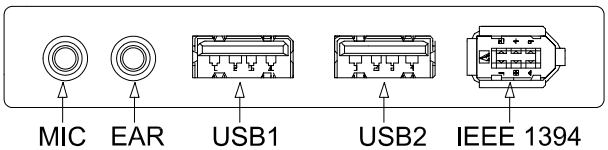

USB 2.0

KEY	10	9	
Black (GND)	8	7	Black (GND)
Green	6	5	Green
White	4	3	White
Red	2	1	Red

IEEE 1394

Black(KEY)	10	9	Black(GND)
White(+12V)	8	7	White(+12V)
Green(TPB+)	6	5	Red(TPB-)
Black(VG)	4	3	Black(VG)
Blue(TPA+)	2	1	Orange(TPA-)

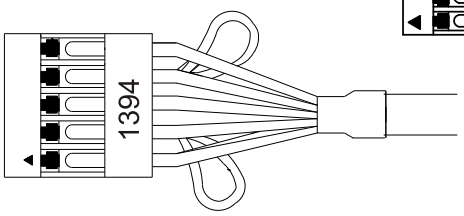

HD AUDIO

Blue(PORT2 L)	10	9	Green(SENSE2_RETUR)
Black(SENSE_SEND)	8	7	KEY
Yellow(PORT2 R)	6	5	Orange(SENSE1_RETOR)
Brown(PORT1 R)	4	3	Black(PRESENCE)
Red(PORT1 L)	2	1	Black(GND)

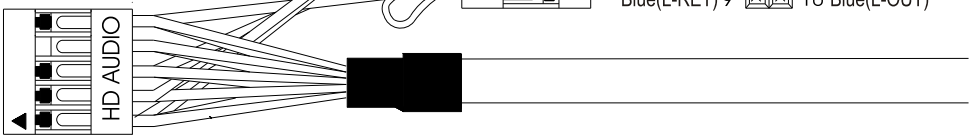

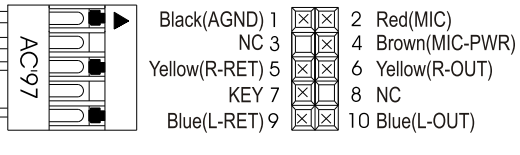

3-speed fan adjustable device

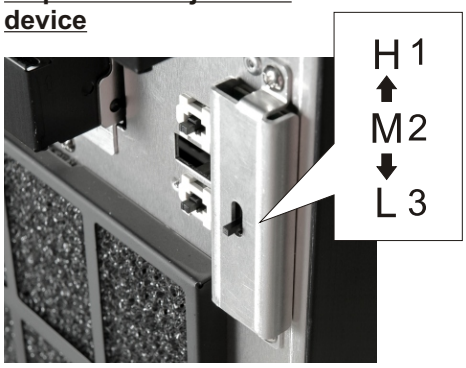

Optional kit